




LED


one piece DECKENFLUTER op8

Der Deckenfluter wird aus einem Stück Aluminium in mawa-design-Falttechnik gefertigt.

Mit der op8 erhält die one piece Serie ein leistungsstarkes Familienmitglied, das spielend auch höhere Decken ausleuchten kann.

Die Lichttechnik sorgt für eine effiziente, gleichmässige und tief in den Raum reichende Deckenausleuchtung. Die Bedruckung im Randbereich der Borosilikatglas-Abdeckung erzeugt einen weichen Lichtverlauf. Das brillante Licht der Hochleistungs-LED und die exakte Justierbarkeit zeichnen diese montagefreundliche Leuchte aus.

-  weiß matt (RAL 9016)
-  dunkelbronze
-  grau metallic (DB 702)
- individuelle RAL-Farben auf Anfrage

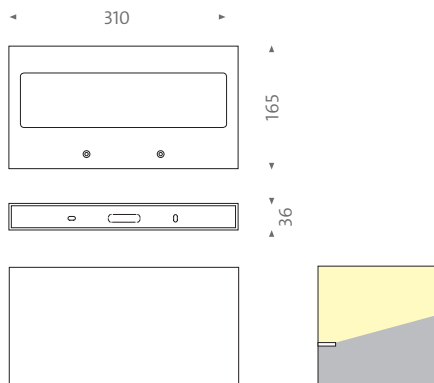

op8

Design: Tan Aksoy, Martin Wallroth

Aluminiumgehäuse pulverbeschichtet, gefaltet

LED Modul:

43 W, Ra > 90 (typ. 92)

Lichtfarben / Lichtstrom: 2700 K / 3240 lm,
3000 K / 3400 lm, 4000 K / 3800 lm

Lebensdauer Standard-LED:

L90 > 55.000 h (IES LM-80 / TM-21)

op8-3 1–10 V

op8-4 DALI

op8-7 Phasen- und abschnitt

op8-8 Push

Produktserie bauartgeprüft durch  DEKRA

Gewicht: 1.700 g

Product Information

mawa®

LED




one piece CEILING-WASHER op8


This ceiling-washer is created from a single piece of aluminum with the signature mawa-design folding technique. With op8, the one piece series has a high-performance addition to the family, which easily illuminates higher ceilings.

The lighting technology creates an efficient, uniform ceiling illumination reaching deep into the room. The special printing at the margin of the borosilicate glass cover produces a soft gradation of light.

The brilliant light of the high-performance LED and the ability to be precisely adjusted are highlights of this easy-installation luminaire.



-  white matt (RAL 9016)
-  dark bronze
-  grey metallic (DB 702)
- individual RAL colors on request

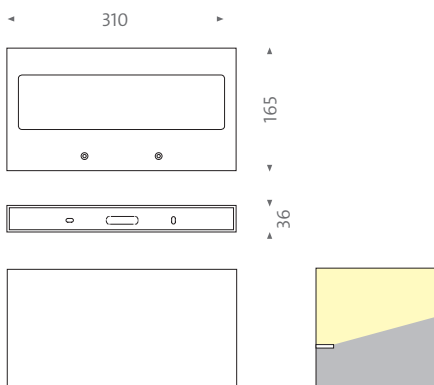

op8

Design: Tan Aksoy, Martin Wallroth

Aluminium housing powder-coated, folded

LED module:

43 W, Ra > 90 (typ. 92)

Light color / luminous flux: 2700 K / 3240 lm,
3000 K / 3400 lm, 4000 K / 3800 lm

Life time LED standard:

L90 > 55.000 h (IES LM-80 / TM-21)

op8-3 1–10 V

op8-4 DALI

op8-7 Leading edge/trailing edge

op8-8 Push


Product series type approved by  DEKRA

Gewicht : 1.700 g



Serienübersicht Series overview

one piece 6 LED




24 W, Ra > 90 (typ. 92)

LED: 2700 K / 1533 lm, 3000 K / 1592 lm,
4000 K / 1703 lm

Gewicht Weight: 920 g

one piece 7




19 W, Ra > 90 (typ. 92)

LED: 2700 K / 1620 lm, 3000 K / 1700 lm,
4000 K / 1900 lm

Gewicht Weight: 1.400 g

one piece 8

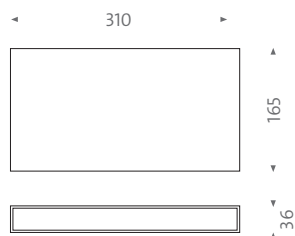

43 W, Ra > 90 (typ. 92)

LED: 2700 K / 3240 lm, 3000 K / 3400 lm,
4000 K / 3800 lm, Ra > 90 (typ. 92)

Gewicht Weight: 1.700 g

one piece 9



86 W (93 W bei phasen- und abschnittsdimmung
for Leading edge/trailing edge) Ra > 90 (typ. 92)

LED: 2700 K / 7650 lm, 3000 K / 8000 lm,
4000 K / 8200 lm, Ra > 90 (typ. 92)

Gewicht Weight: 3.000 g