HOPE

design Francisco Gomez Paz / Paolo Rizzatto, 2009

LUCE PLAN

Type:	Ceiling - Wall		
Light source:	D66/8a	105W HSGSA E27 energy saver	EEL: D
		23W FBT E27	EEL: A
		LED 18W E27	EEL: A
	D66/3a	120W HDG R7s	EEL: C
	D66/12p	3 x 24W HSGSA E14 energy saver	EEL: D
		3 x 12W FB E14	EEL: A
		3 x LED 6W E14	EEL: A
	D66/30p	3 x 105W HSGSA E27 energy saver	EEL: D
		3 x LED 18W E27	EEL: A
		3 x 23W FBT E27	EEL: A

Product use: Indoor

Materials: Structure in polished stainless steel and polycarbonate arms, polycarbonate prismatic lenses

Colors: Transparent

Description: The polycarbonate lenses achieve a dioptric effect similar to glass without any limitations in terms of space, thickness and weight. Hope – the fruit of a brilliant project and manufacturing process – has been designed for use with any type of light source: the latest generation of halogens and energy-saving fluorescent light bulbs.

Insulation class: (D66/12p - D66/8 a)

Awards:
Red Dot Design Award 2010, prize
Good Design Chicago Athenaeum 2010, prize
Premio dei Premi 2011, prize
Compasso d'Oro ADI 2011, prize
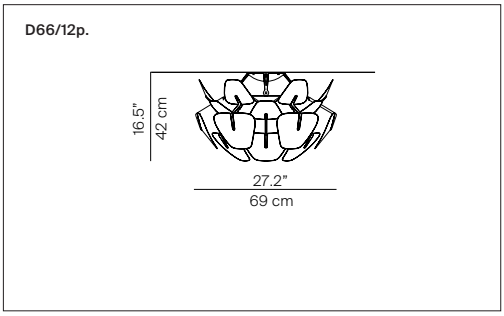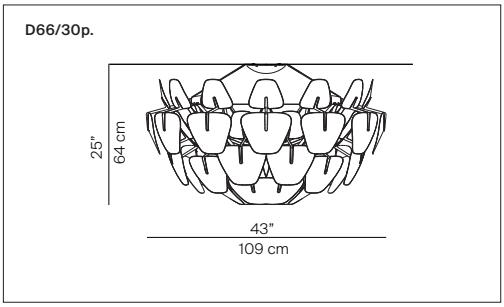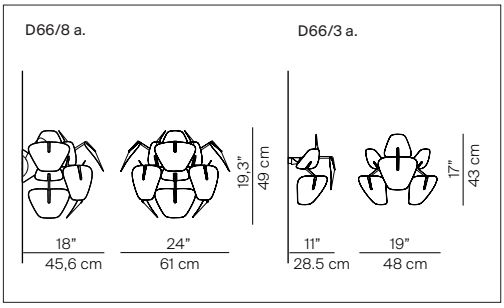
Reference code:	D66/3a	1D6603A00000
	D66/8a	1D6608A00000
	D66/12p	1D6612P00000
	D66/30p	1D6630P00000