


Byok

Piani Mono 95 Downlight

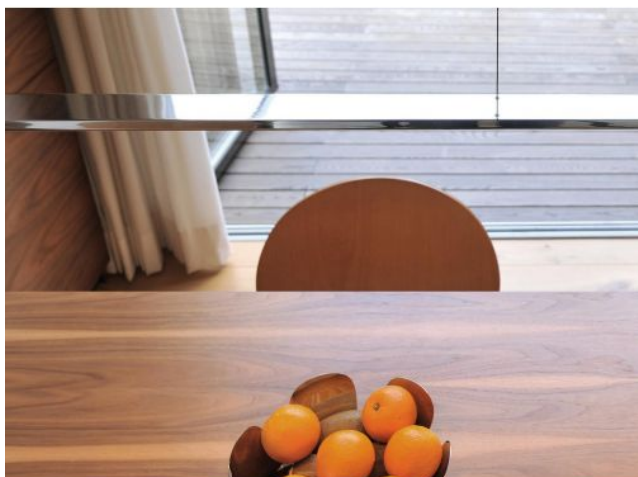


Oberfläche

- aluminium poli
- Matt aluminium
- noir mat

Höheneinstellung

- réglable en hauteur
- hauteur déterminée

Technical details

Pays de fabrication	 Allemagne
Fabricant	Byok
Créateur	Kai Byok
Indice de protection / Indice IP	IP20
Contenu de la livraison	LED
aptitude de tension	230 - 240 Volt
matériel	aluminium
longueur de câble	300 cm
atténuation	dimmerable sur place avec commande gradateur de phase inverse
LED	y compris
Indice de rendu des couleurs	>90
La température de couleur en Kelvin	2.700 extra blanc chaud
remplacement des ampoules :	chez le fabricant / a l'usine
Les performances du système	6 x 3,6 Watt
Flux lumineux total en LM	1.830
Dimensions	H 1 cm B 5 cm L 95 cm

Description

The Byok Piani Mono 95 Downlight is a pendant lamp with a length of 95 cm. Its body is made of 10 mm thick solid aluminum. It is possible to tilt the pendant light in the longitudinal axis for glare-free workplaces and dining room tables. The lamp is offered height-determinable or height-adjustable up to 300 cm each. With the height-determinable version, the cables can be set to the desired length during installation; with the height-adjustable version, the overall height can also be adjusted after installation.

The Piani Mono 95 Downlight from Byok is available in matt aluminum, polished aluminum and matt black finishes. Six modern, replaceable LEDs are included. The LEDs can be **dimmed on site with a trailing edge phase dimmer**. On request, they are also available with gesture control and Dim2Warm technology. With gesture control, the light is dimmed by holding the hand flat under the lamp. With Dim2Warm technology, the light takes on a warmer colour when dimmed. When dimmed, the light colour of the LEDs changes from 2,700 Kelvin extra warm white to 2,100 Kelvin extra warm white. The dimming range is between 0 and 100 percent. In addition, the lamp is also available on request as a version that can be dimmed by smartphone/tablet via Bluetooth.