

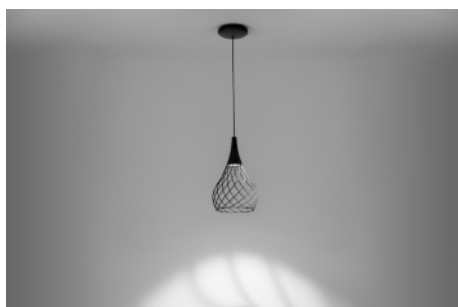


Pendelleuchte | 220-240 V | topLED 16 W 350 mA | CRI 90 | Warm Tune
8140



Technische Daten	
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Optik	General Lighting
Light emission direction	downward
Lampenleistung	16 W
Lichtstrom (Lichtquelle)	1000 lm
Frequency	60 - 50 Hz
Ähnlichste Farbtemperatur / Tonalità	Warm Tune
Farbwiedergabeindex	90 Ra
Isolierklasse	1
IP	IP20
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
ETL	Nein
Einschließlich Driver	Ja
Leuchte dimmbar	Phase cut
Induzione	Nein
Notbeleuchtung	Nein
Motion sensor	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehrbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein

Oberfläche Gehäuse	
Materiale lega	Eisen
Farbe	Schwarz RAL 9005
Bearbeitungstyp	Lackierung
Oberfläche Diffusor	
Materiale lega	PC
Farbe	transparent
Oberfläche Fassung	
Materiale lega	Eisen
Farbe	Schwarz RAL 9005
Bearbeitungstyp	Lackierung

Pendelleuchte | 220-240 V | topLED 16 W 350 mA | CRI 90 | Warm Tune
8140


Single emission pendant luminaires for indoor application. The warm tune LED light source with a general lighting light distribution is composed of 1 topped LEDs with CCT of 1800K-3000K K and a CRI 90; the source luminous flux is 1000 lm, with a 62.5 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.


The device body is made of iron and features a black ral 9005 finish, processed by means of coating; the diffuser is made of PC; the mounting frame is made of iron, with a black ral 9005 finish, processed by means of coating. The ingress protection degree is IP20; The power supply driver is included in the delivery.

The total absorbed power is 16 W.

The device features protection class I and can be ceiling-mounted.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	55 %
Lichtstrom (Lichtquelle)	1000 lm
Leuchten Lichtstrom	553 lm
Consumption	16 W
Leuchten Lichtausbeute	34 lm/W
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra

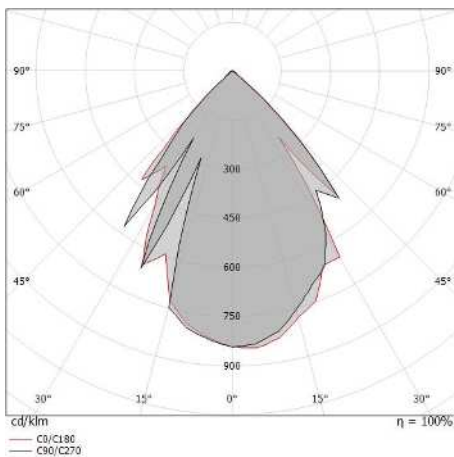



Dimmer
PUSH DIM, 220-240V

Code
KIT0026



Dimmer
Bluetooth, 85-240V

Code
KIT0080