

# REMOS series receiver

## MODEL: LPT-REMOS-CV8A

LAMP I A tech




### Feature

- Work with different sender
- Work with WIFI transmitter
- Control Single color LED lighting.


### Parameter

Part No.	Input Voltage	Output Current	Output Power	Remarks
LPT-REMOS-CV8A	12-36VDC	1x8A	1x(96-288)W	Constant voltage

### Product Size

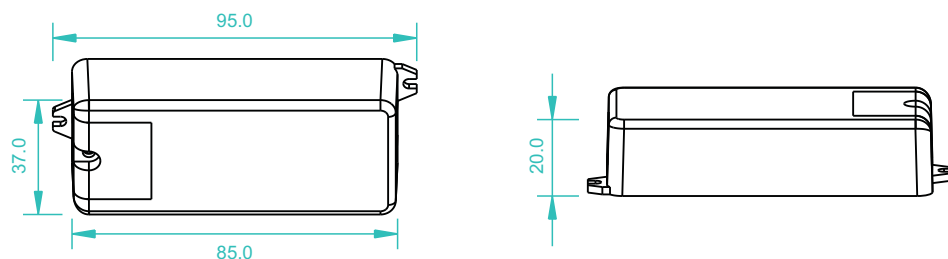

### Wiring diagram

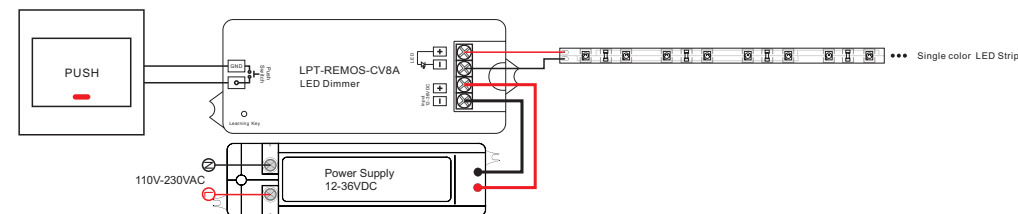

### Operation

#### Learning (matching)

- Do wiring according to connection diagram
- Wake up the remote control by touching ON/OFF button.
- Press learning button on receiver.
- Touch any zone button on remote control.
- Then touch color wheel.
- Connected LED light will blink to confirm zone designation.
- Press at learning button on receiver over 5 seconds until LED light flash, then delete the learned ID.

### Warranty Agreement

- We provide lifelong technical assistance with this product:
  - 2-year warranty. We print date on every products, for example :1125 means year 2011, week 25. The warranty is for free repair or replacement and covers manufacturing faults only.
  - For faults beyond the 2-year warranty we reserve the right to charge for time and parts.
- Limited Warranty
  - Any defects caused by wrong operation.
  - Any damages caused by unauthorized removal, maintenance, modifying, incorrect connection and replacement of chips.
  - Any damages due to transportation, vibration etc. after purchase.
  - Any damages caused by earthquake, fire, lightning, pollution and abnormal voltage.
  - Any damages caused by negligence, inappropriate storing at high temperatures and humidity or near harmful chemicals.
  - Product has been updated
- Repair or replacement as provided under this warranty is the exclusive remedy to the customer.

### Safety & Warnings

- The product shall be installed and serviced by a qualified person.
- IP20. Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
- Always be sure to mount this unit in an area with proper ventilation to avoid overheating.
- Please check if the output voltage of any LED power supplies used comply with the working voltage of the product.
- Never connect any cables while power is on and always assure correct connections to avoid short circuits before switching on.
- Please ensure that the cable is secured tightly in the connector
- For update information please consult your supplier.

Distributor: HEMAK s.r.o., Chmelníky 38, 040 16 Kosice, Slovakia  
Contact: sales@lampiatech.com, + 421905 549 345, www.lampiatech.com